

Laser 260 60"

Specifications

WING SPAN: 60"(1500mm)

LENGTH: 57.5"(1460mm)

WING AREA: 607.6sq.in(39.2dm²)

FLYING WEIGHT: 4.4-4.6lbs(2.0-2.1kg) (not included battery)

Motor: Hacker A50-14XS

Prop: 15x8 or 16x8

ESC: Castle Talon 90 ESC

RADIO:4CH/5S or 4s 1ESC

3 Colour schemes



AeroPlus RC

Unpacking

Carefully unpack the model making sure that if you use a sharp knife to open bags, not to cut any covering on the model. Inspect each item to make sure no transit damage has happened. If you are not happy with any part or are unsure please contact the Dealer that you purchased from.


Covering

Due to the model spending time in different climates zones from the factory on its way to you, some of the covering may have wrinkles. We highly recommend that you take time to re-seal all covering edges with an iron and to use a heat gun to remove any wrinkles and re-tighten the covering. It is best to do this now while the plane is not assembled, remember to not let any heat get near any parts like the canopy or cowl as this may cause damage.

Assembly Tips


We also recommend that you go over all the accessible joints with cyano glue. Wick glue into areas of high stress around the U/C plate and motor box.

Use Nutlock on all metal to metal joints. Even if you are using electric with low vibration levels it will make sure that things do not drop off your airplane!!

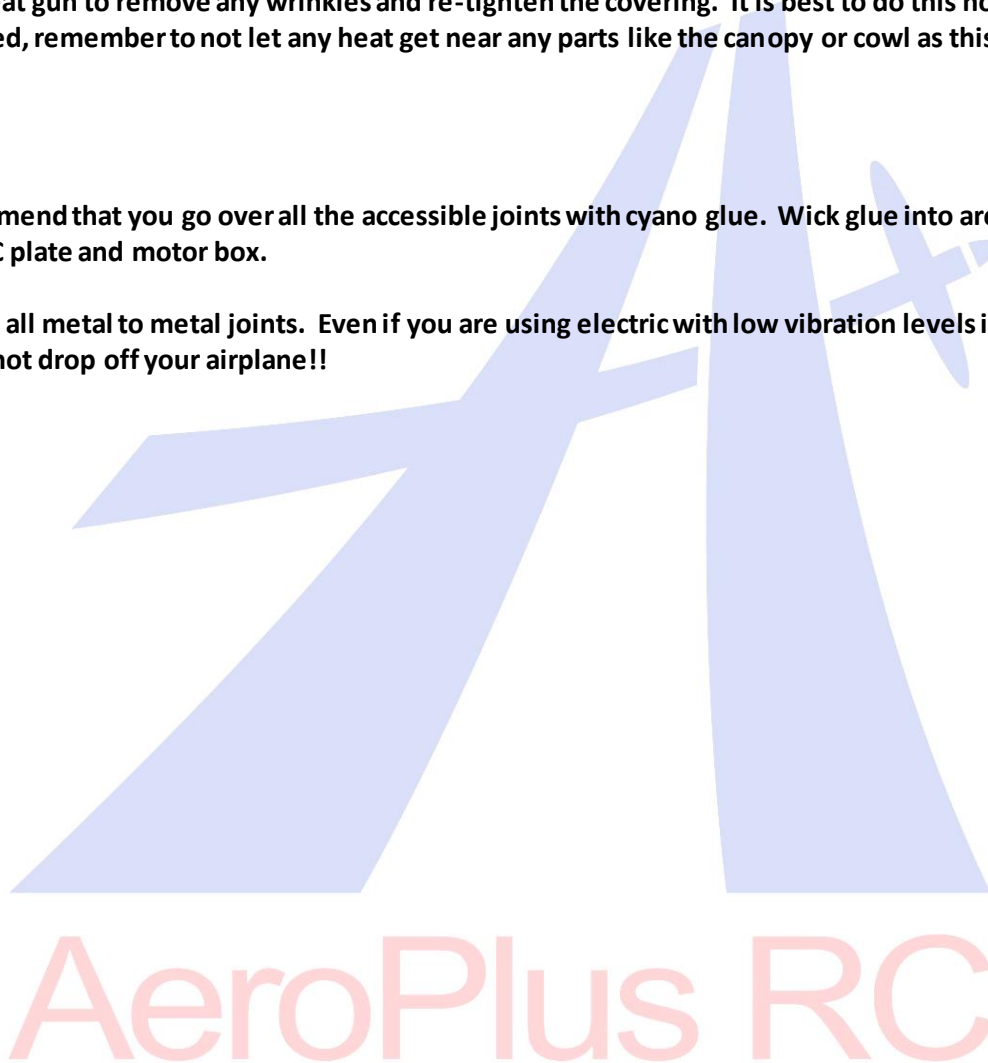

Landing Gear Assembly

To stop the fuselage getting damaged while the model is assembled we recommend fitting the landing gear first.

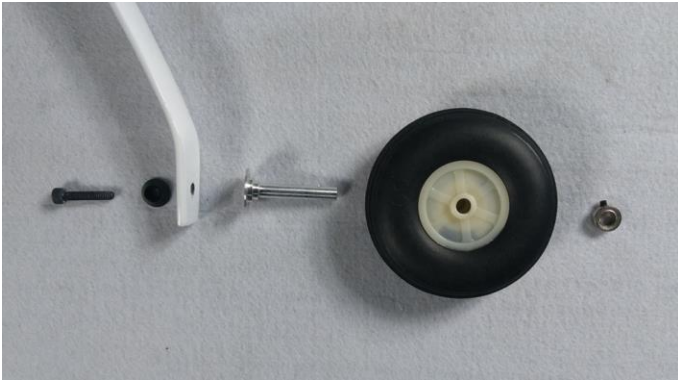


- 1



- 2



- 3



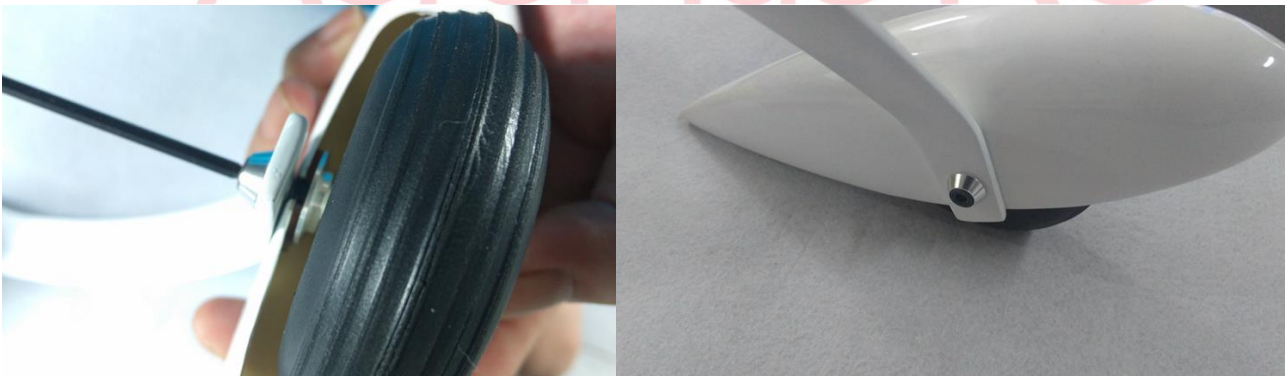


Rear Stab

- Remove the elevators and hinges from the rear stab and place it in the opening.



It is important that care is taken when aligning the rear stab. Measure each side to make sure that an equal amount shows on each side.



- Fit the CF wing tube and looking from the front and back check that the elevator plate is in horizontal alignment to the rear stab. If it is not then trim the opening so that it is equal.
- Fit the wings and measure from the end of the wing to the elevator stab to make sure that both sides are equal

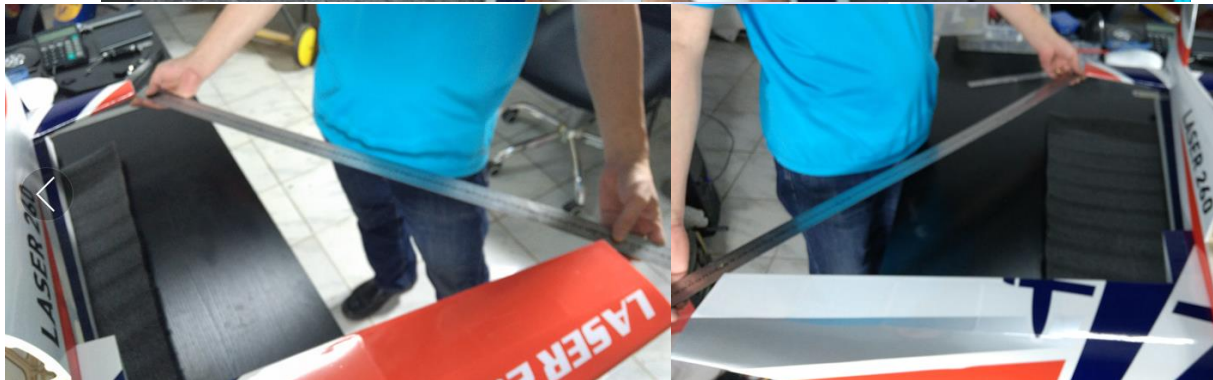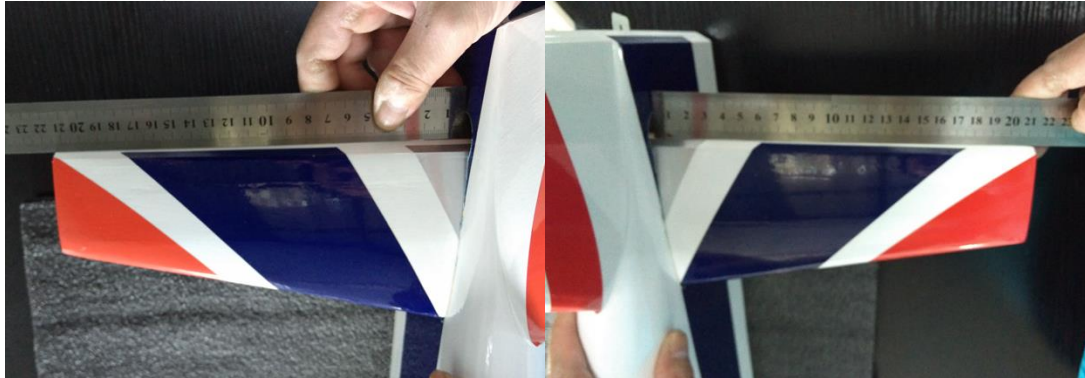



- Glueing – Once you think you are ready to glue, measure again. We recommend 2 methods for glueing. Either remove the covering on the area that is covered by the fuselage and glue with CA or epoxy, or leave the covering on and glue with thin cyno. Wicking in thin first, if a large gap is visible then use medium or thick. Remember to wick in small amounts at a time keeping the plane level, this will ensure the glue stays where it needs to be.




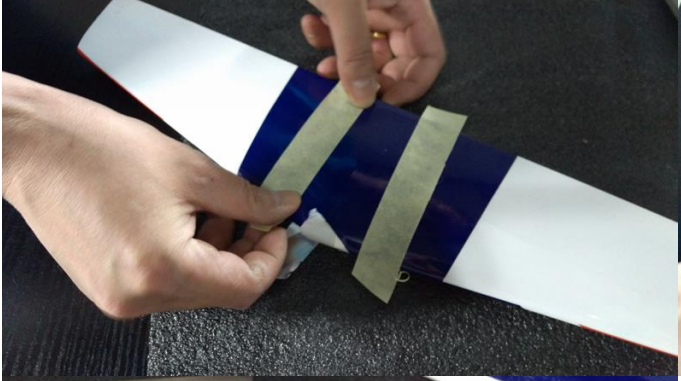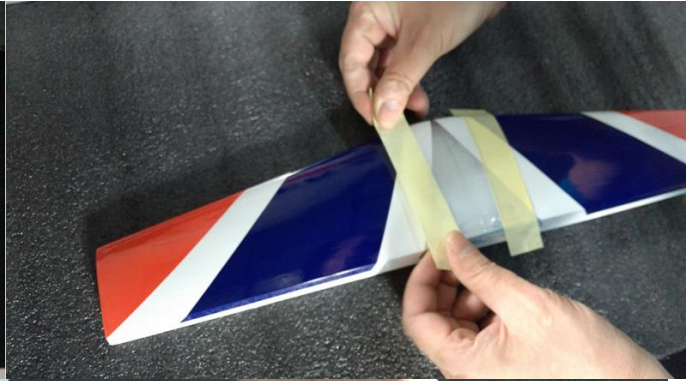

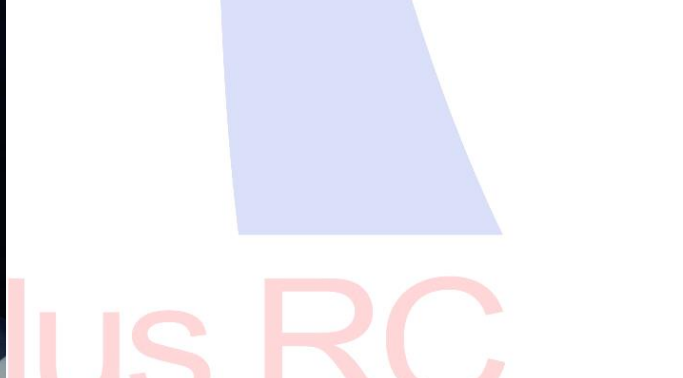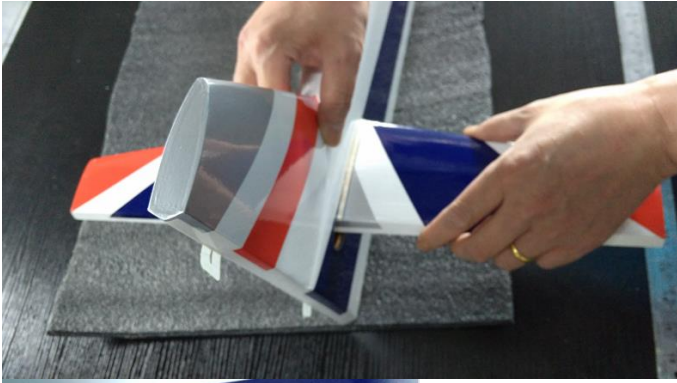

plus RC

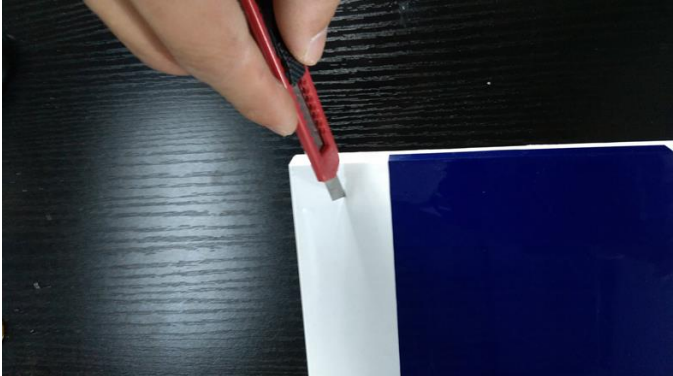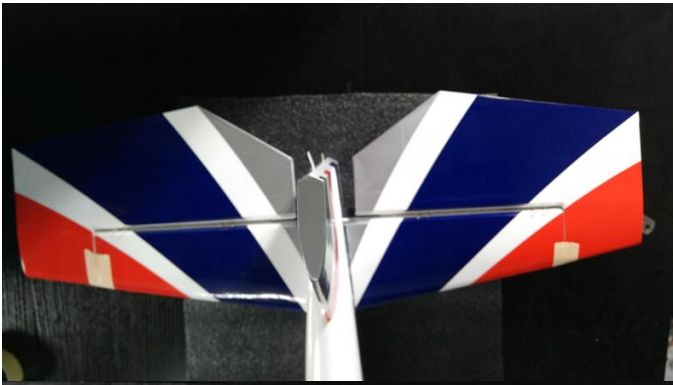

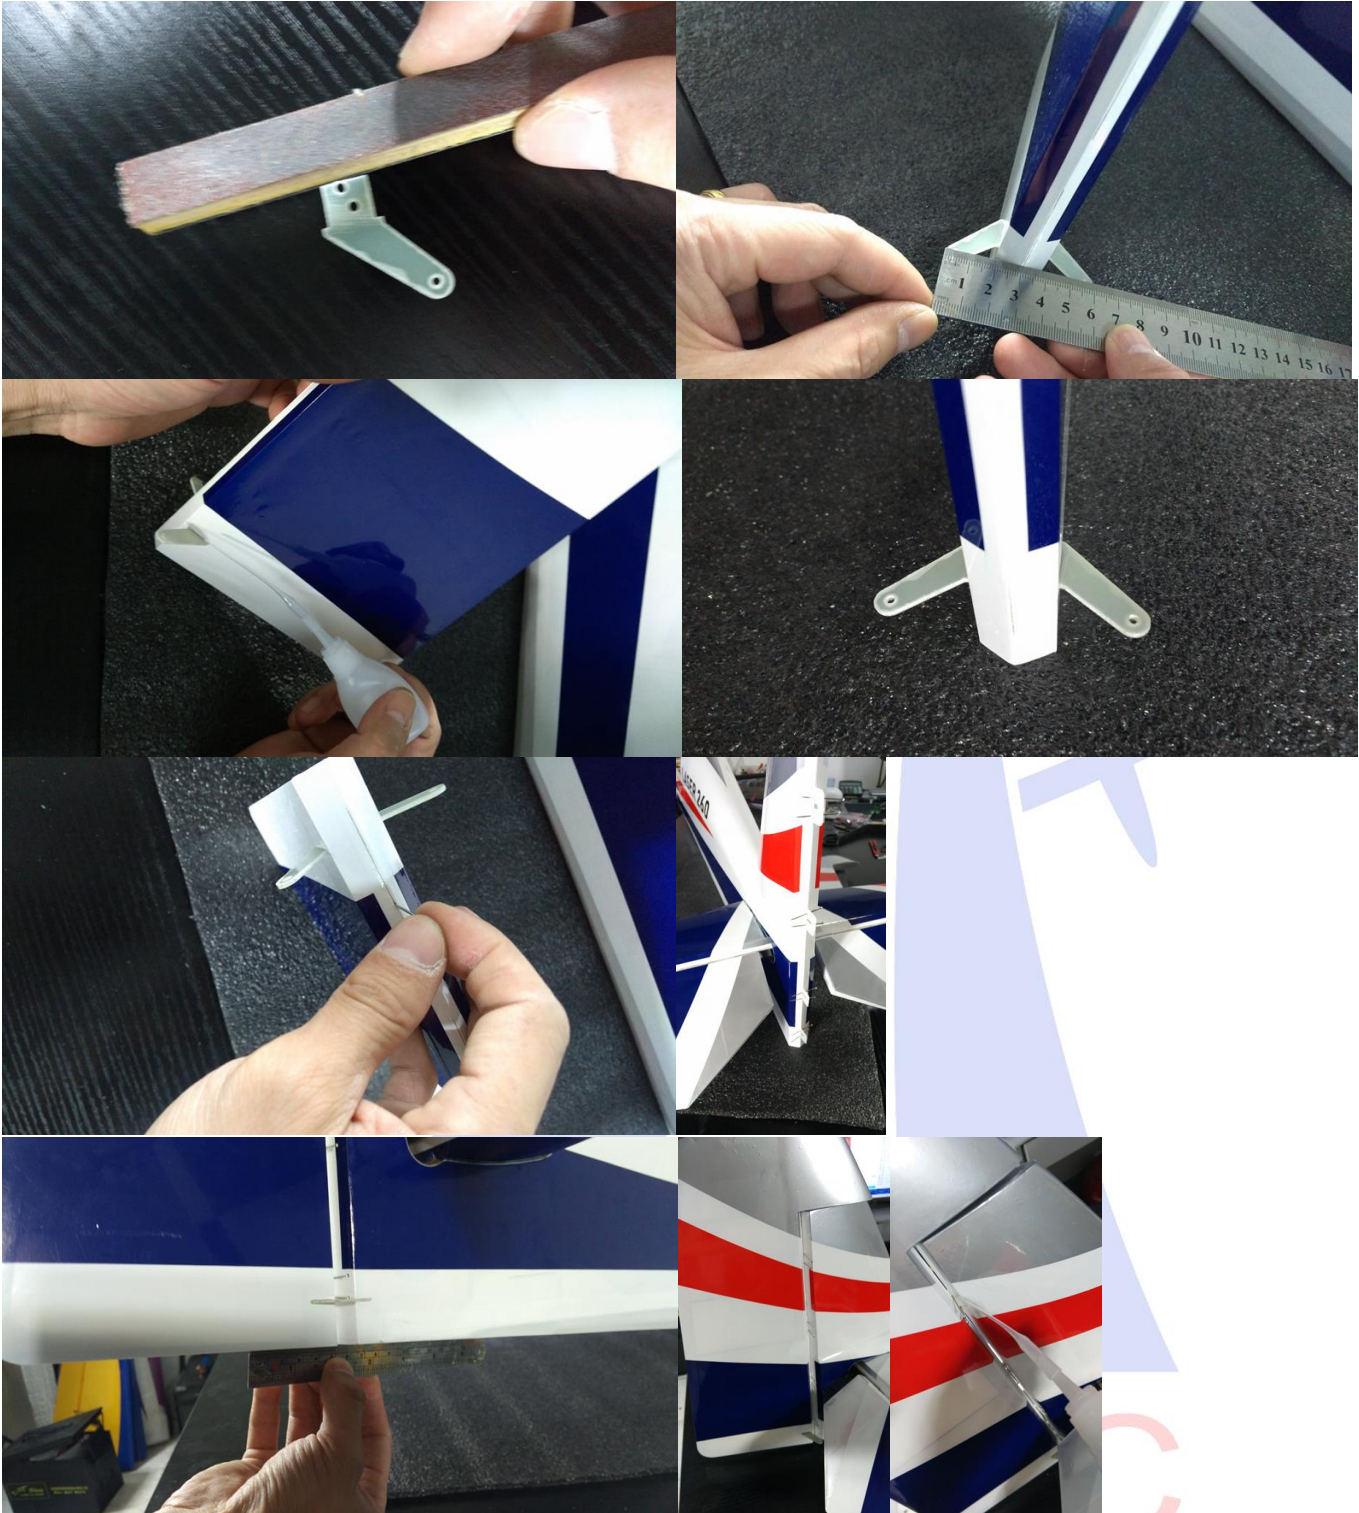

5


- Remove the covering for the elevator servo




- Remove the covering where the elevator horns fit, use either a soldering iron or a sharp knife.



- The area on the horns that goes inside the elevator needs to be roughed up with sandpaper. This allows a better glue joint.

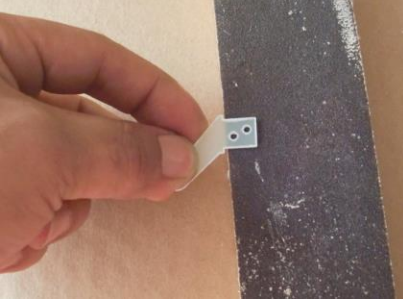

- Glue the horns in place with epoxy glue or CA.
- Before fitting the elevator servo fix an extension lead so that the wire can be routed through the fuselage. On the servo lead joint add a servo plug clip.



- Fit the Elevator Servo servo and using a fine drill, drill holes for the servo screws. Remove the servo and drop thin cyno into all 4 holes.




- Re-fit the elevator servo and secure it in with servo screws.
- Centre the servo using your TX, and fit a servo arm. Screw ball joints onto the pushrod (use pliers to hold pushrod) and bolt in place with supplied bolts. Centre of servo should align with elevator flat to the stab.




- If you are using dual elevator servos then repeat the process on the other side.

Rudder

- Remove the covering where the rudder horns push through with either a knife or soldering iron.

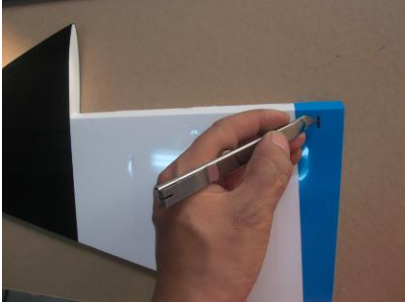

- Test fit the rudder horns

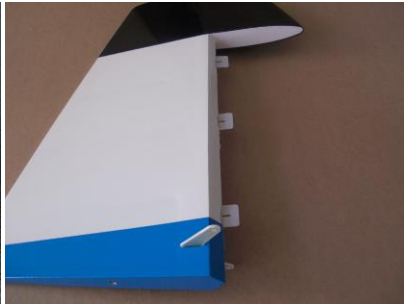


- Sand the area on the horn that fits inside the rudder so the glue bonds better




- Glue the rudder hinges into both the rudder using CA. While drying use tape to keep it in alignment.



- Glue the rudder horns through the rudder with CA.

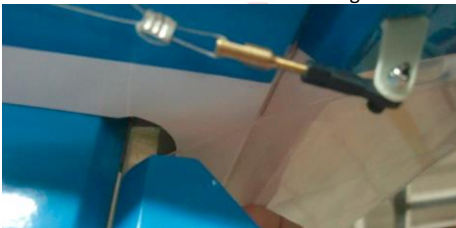

- Assemble the rudder servo control arm as below, drill holes for screws and use cyno to stop the nuts from coming loose.

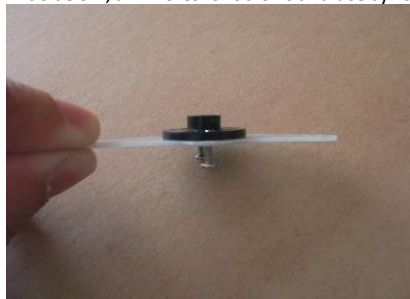

- At the rear of the fuselage you will find a ply wood area, lay the CF gear on this and mark the 3 holes. Taking care to make sure it is straight.
- Drill each hole with a fine drill and drop thin cyano into the holes to strengthen the wood.




- Screw the gear on with the supplied self tapping screws.



- Drill a hole in the base of the rudder for the rudder steering guide.




- Before gluing with cyano, place it over the thin rod.

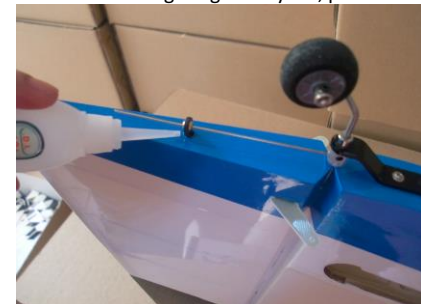




Aileron Servos


- The ailerons

AeroPlus RC

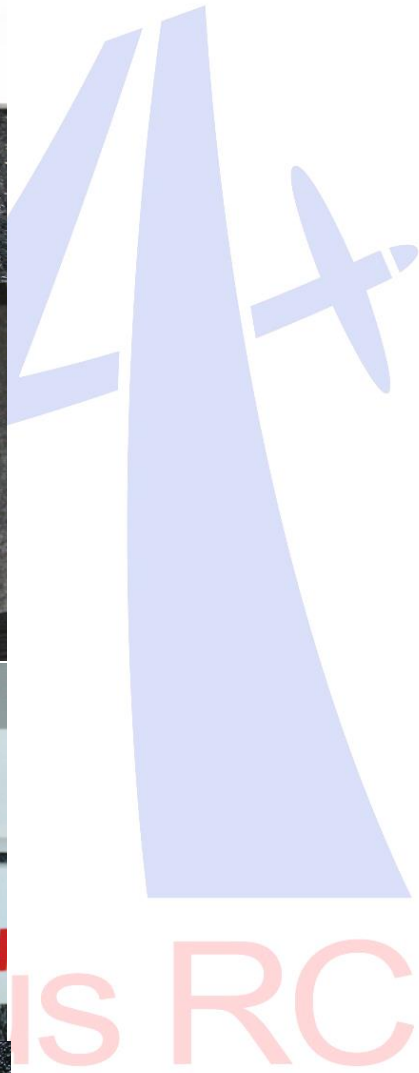

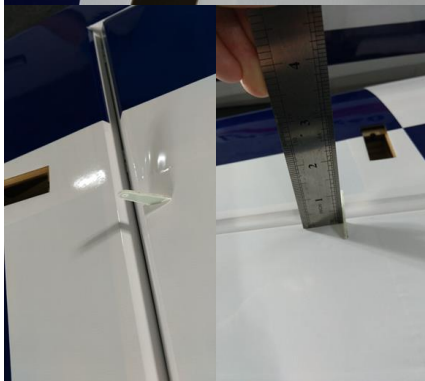

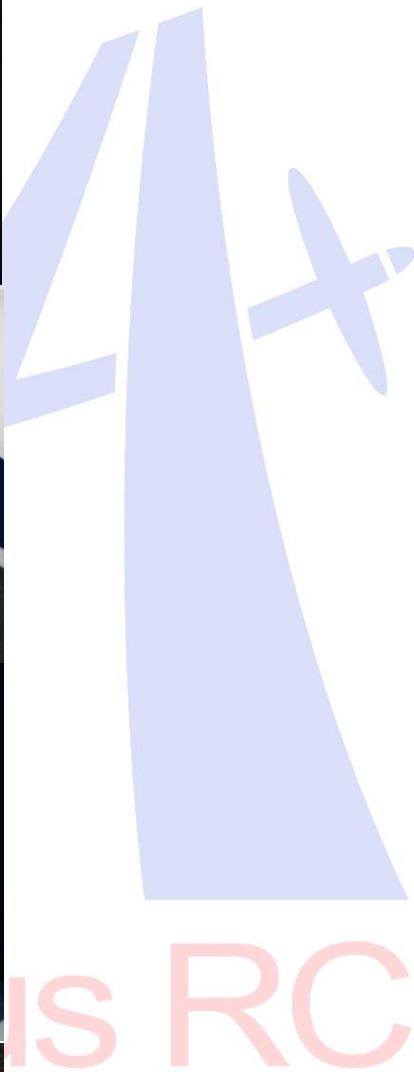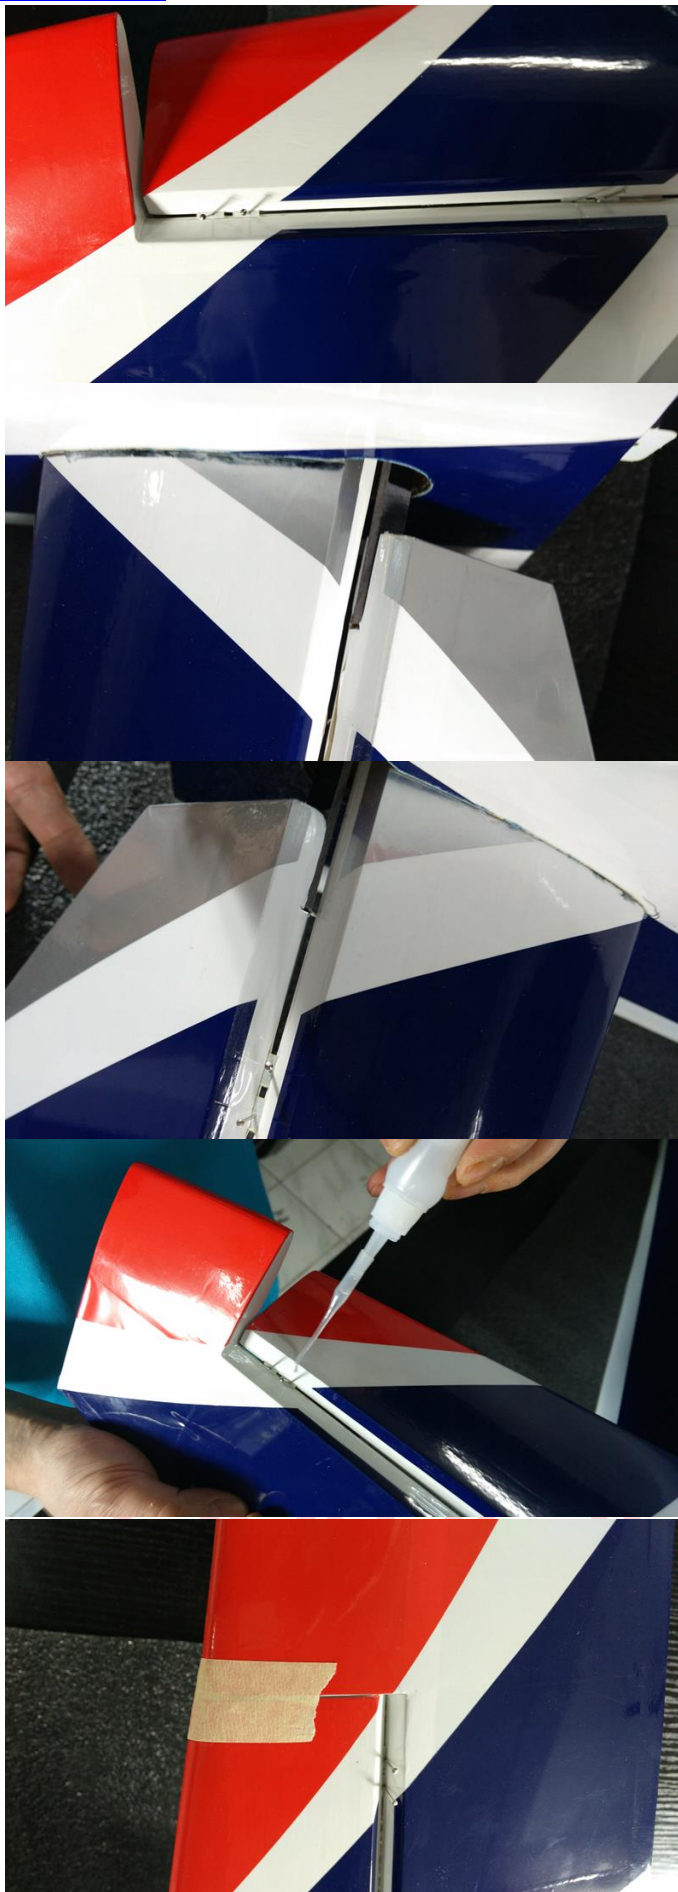


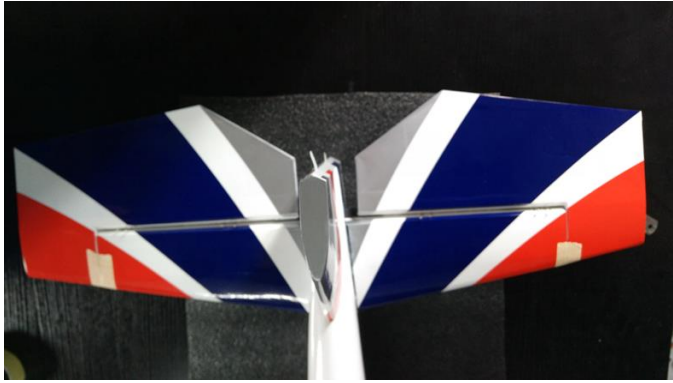

- Remove the covering where the aileron horns are glued in place. Use either a soldering iron or a sharp knife



- Using sand paper rough the area that will be glued into the aileron.

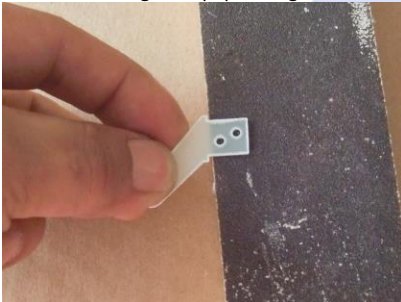


- Glue both horns in with CA.




- Fit the aileron servo and drill fine holes where the servo screws will fit, then install the servo.




- If required install a servo extension lead onto the servo, remember to use a servo plug clip.

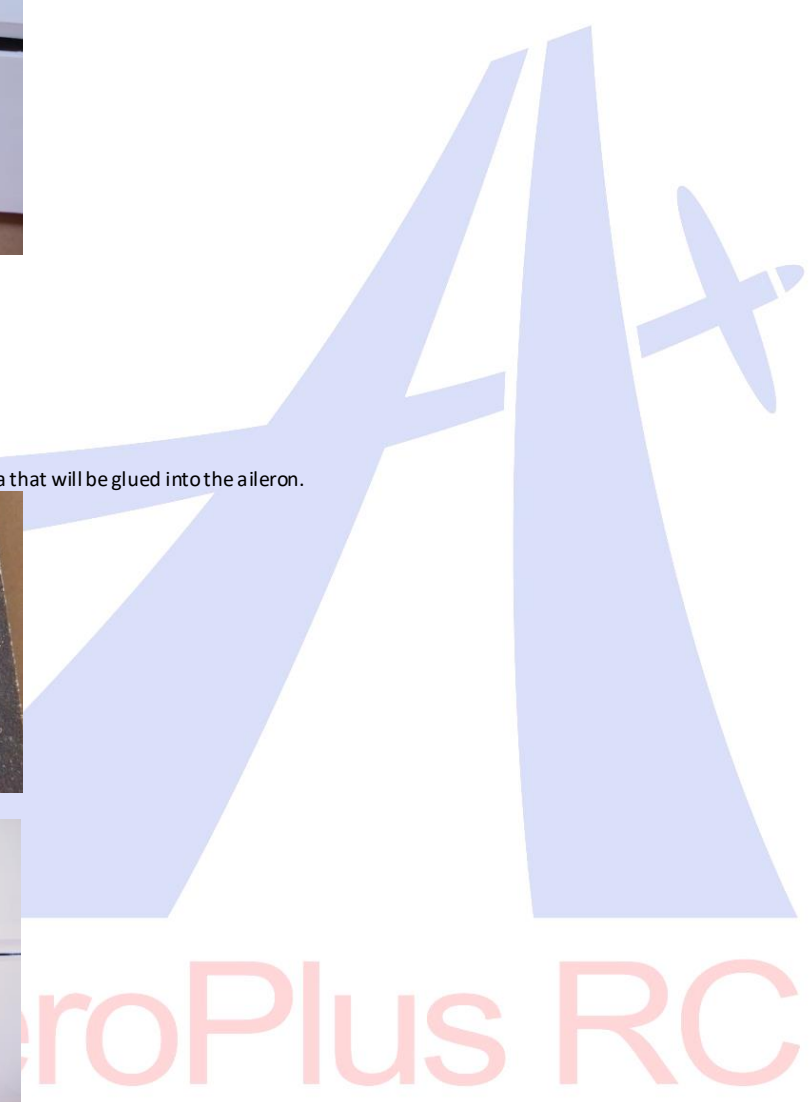





- Fit the servo and centre the servo arm.

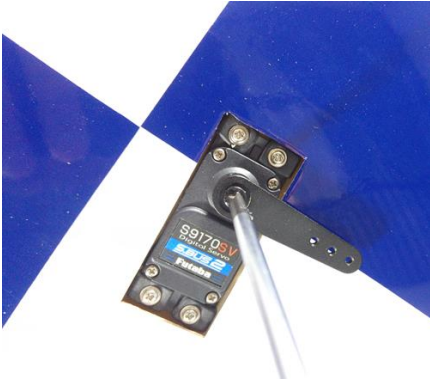

- Using the pushrod supplied screw ball joints onto each end. The correct length will leave the aileron lined up to the inner part still attached to the wing.




- Using supplied bolts attach the pushrod at both ends. Check to see you have sufficient movement of the aileron. If not adjust.

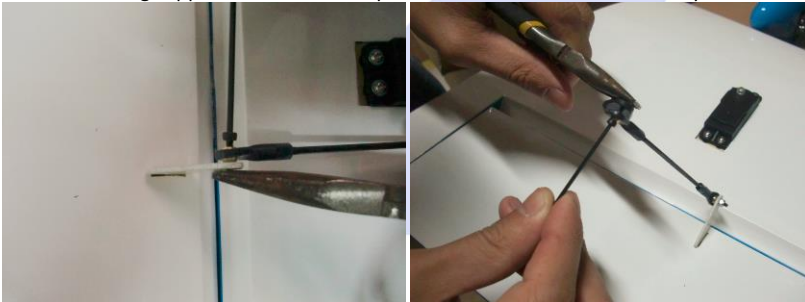


- Carry out the same procedure on the other wing.

Electric


- Using the lines on the firewall, mark using your mount as a guide. Then drill suitable holes.

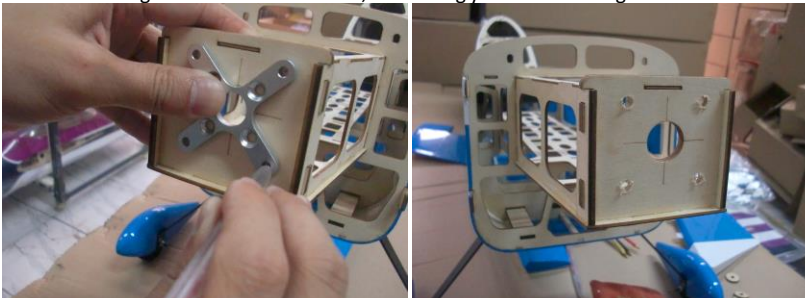

- Depending on the length of your motor you may need to use the supplied round plywood spacers to achieve the correct length for the motor.

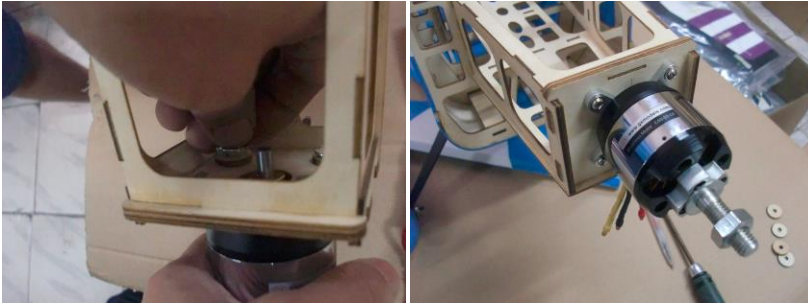

- Mount the ESC in airflow on the side of the electric motor mount, using a velco strap.
- The cowl is fixed in 4 places, 2 at the top and 2 at the bottom. Place masking tape over the bottom 2 and pierce where the blind nut hole is.

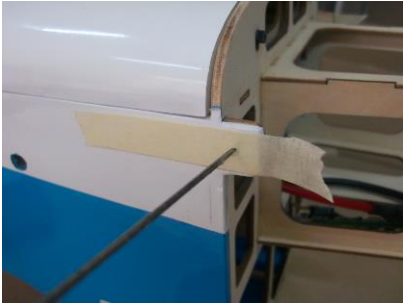

- Refit the cowl and drill where the marked hole was.



RX

- A convenient place to mount the RX is just in front of the rudder servo. Ensure that it is mounted on velco and strapped down.



Canopy

- The canopy is held in place with the lock. Ensure that it is fully engaged before flying.



Set-up

We highly recommend the use of both dual rates and exponential. This will allow the model to fly both precision and 3D at the flick of a switch.

	Low Rates	Exponential	High Rate	Exponential
Elevator	15-20 deg	15-20 %	35-45 deg	45-60 %
Ailerons	15-20 deg	15-20 %	35-45 deg	45-60 %
Rudder	25-30 deg	15-20 %	35-45 deg	45-60 %

For test flights always use low rates, remember that + and – exponential is different per manufacturer, check your TX manual.

Always check the range on your model before the maiden flight. Carry out a short flight then go over everything to make sure nothing has come loose.

CG Location

We suggest for initial test flights set the CG 117mm or 3 2/3 inches from the leading edge of the wing.

Adjust after first flights to personal preference.

Enjoy Flying!



AeroPlus RC